

# MP9812M 10 Channels Monitor Panel




## Features

- 10-channel inputs
- Individual Volume control
- A five-element LED level meter is provided
- Built-in monitor speaker
- Friendly control panel, easy for use

## Specification


<b>Channels</b>	10, switchable
<b>Inputs</b>	70 ~ 100 V , 10 k $\Omega$
<b>Output</b>	65 dB SPL Variable
<b>Frequency response</b>	100 Hz---15 kHz
<b>Signal to noise ratio</b>	80 dB
<b>Speak</b>	Inside
<b>Protection</b>	AC fuse $\times$ 1
<b>Power Requirement</b>	AC 220 ~240 V / 50~60 Hz
<b>Dimensions</b>	485 $\times$ 88 $\times$ 365 mm
<b>Gross weight</b>	6.5 kg
<b>Net weight</b>	5.2 kg

## FRONT PANEL

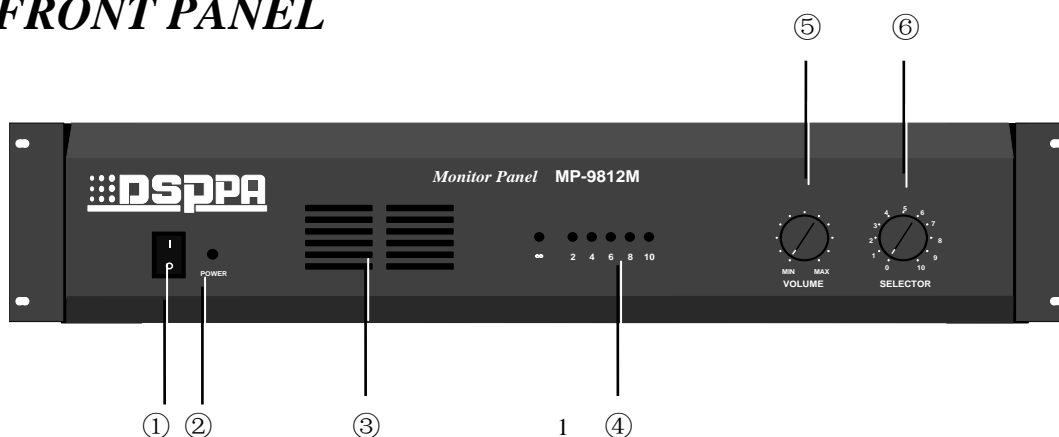


- ① Power switch
- ② Power indicator
- ③ Monitor Speaker
- ④ LED level meter
- ⑤ Volume control
- ⑥ CH Select switch

## REAR PANEL

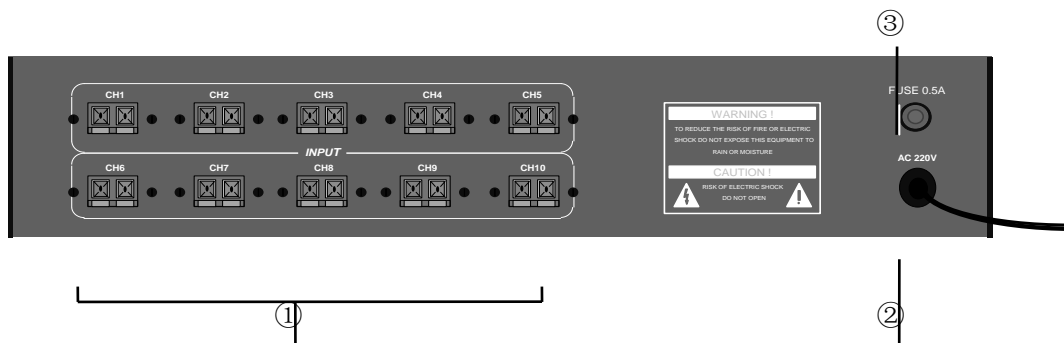

- ① 1~10CH input terminals
- ② AC power cord
- ③ AC fuse.

## CONNECTIONS

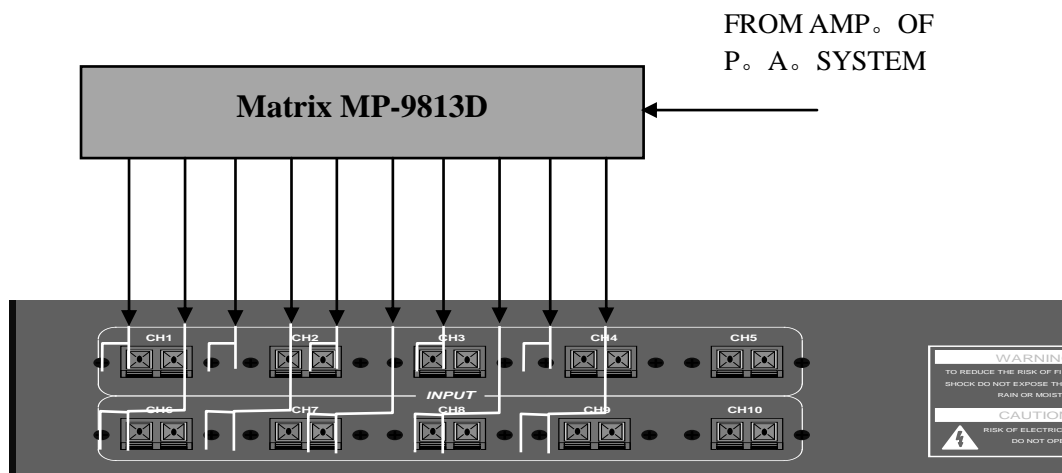

## OPERATION

- 1 Make connections as shown above then turn on the power.
- 2 Select channel which you want to monitor with **CH Select** switch. Speak on the front panel will sound with **LED** meter lit.
- 3 Control the volume with **Volume controller** on front panel.