


MAG2123S

Sequence Controller

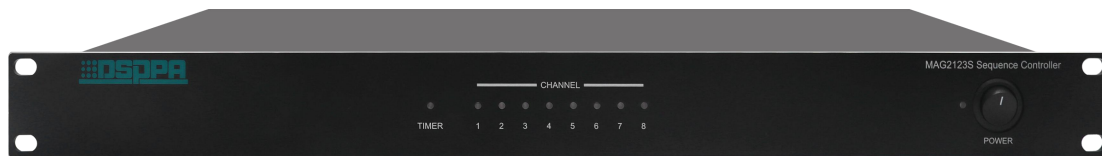

Features

- Independent high power output;
- Universal socket which supports multiple three-pole power socket;
- Maximal output of single channel is 10A;
- Total input current capacity is 10A;
- On/off status of each channel on front panel for monitor use;
- One-click switch to turn on/off each channel ;
- Can power on/off the amplifier in sequence to avoid high current to damage the amplifier or the power supply system;
- Can be widely used in multimedia classrooms, multi-function halls, conference rooms, projection splicing, video conferencing, monitoring center, building control, management and command center and other fields.

Specification

Model	MAG2123S
Power Output	8 channels, universal socket
Single-channel Maximum load	10A
Control Manner	Manual sequential startup, external short-circuit signal trigger startup
Power Capacity	Total 220V, 10A
Input Power	AC220/50Hz
Sequence Interval	About 0.5s
Package Size (L×W×H) (mm)	534×350×110
Machine Size (L×W×H) (mm)	484×225×44
Net Weight	4.4kg
Gross Weight	5kg

Note: The performance specifications are subject to changes without further notification.