

## DSP9321A DSP9321B DSP9326A DSP9326B

### Intercom Terminal



DSP9321A



DSP9321B



DSP9326A



DSP9326B

### Description


The DSP9321A DSP9321B DSP9326A DSP9326B Intercom Terminal is a fully digital network intercom equipment, with mature VOIP solution for its core part, stable and reliable, and the digital full duplex for hands-free device, loud and clear. It is durable and simple to install with comfortable buttons, generous appearance and low power consumption.

### Features


- 2 SIP lines.
- Full-duplex hands-free calling.
- Editable call button (one-key call, intercom key, etc.).
- Wall-mounted installation.
- Built-in 2 short-circuit inputs.
- Built-in 2 short-circuit outputs. 4 controlled methods: remote DTMF, remote service command, short-circuit input linkage and call status.
- External active speaker output interface.
- Support POE power supply.
- With multicast function.
- Three functions in one: intercom, broadcast and smart security.
- In compliance with IP54.

Model	DSP9321A	DSP9321B	DSP9326A	DSP9326B
Communication Protocol	SIP 2.0(RFC-3261)			
Voice Streaming	Supported Protocols	RTP		
	CODEC	G.729, G.723, G.711, G.722, G.726		
	Audio Amplifier	2.4W		
	Volume Control	Adjustable		
	Full Duplex Hands-free	Support (AEC)		
	Speaker	1 (XH2.54 pin)		
	Short-circuit IN	2 (3.5mm pin)		
	Short-circuit OUT	2 (3.5mm pin)		
	LINE OUT	2 (3.5mm pin)		
	LINE IN	1 (3.5mm pin)		
	LAN	10/100BASE-TX s Auto-MDIX, RJ-45		
Power Supply	PoE power supply or 12V / 1A DC			
Recommended Cable	CAT5e or above			
Working Temperature	-20°C to 70°C			
Relative Humidity	10% - 95%			
Storage Temperature	-40°C to 70°C			
Machine Dimensions (mm)	190×115×45		210×115×45	
Package Dimensions (mm)	268×173×73			
Gross Weight	0.9KG		1KG	
Net Weight	0.5KG		0.6KG	


## Product Information

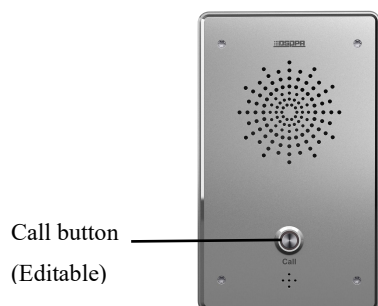


DSP9321A

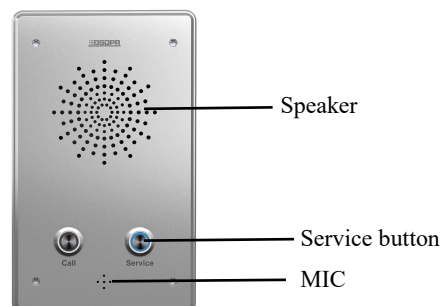

DSP9321B

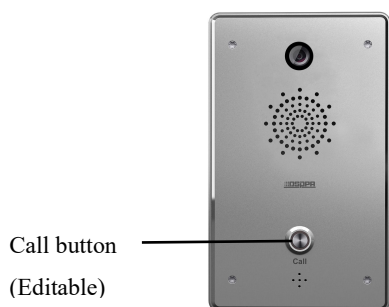

DSP9326A

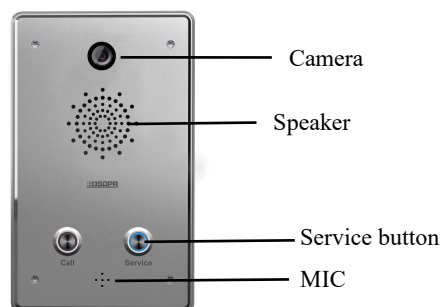

DSP9326B