

MP9813C

Broadcast Partitioner



Description


MP9813C broadcast partitioner has 2 channels of inputs and 10 channels of outputs. With override function, it can input emergency broadcast signal. Besides, it has 10 zone selection buttons with independent volume control.

Features

- With 2-channel inputs (A & B), and 10-channel outputs.
- With override function.
- With ALL ON/OFF function control.
- With independent volume control for 10-channel zones (valid for the channel A input audio source).
- Support automatic switching of the corresponding channel to the channel B when there is an alarm signal input.

Specifications

Model	MP9813C
Number of Channels	10 channels, which can be selected arbitrarily.
Input Capacity	70-100V, 10A
Output Capacity	70-100V, 5A for each channel
Alarm Signal	Valid for 0V (short circuit)
Protection	AC Fuse
Power	AC 220V/50Hz
Package Dimensions (mm)	(L×W×H) 530×440×195
Machine Dimensions (mm)	(L×W×H) 484×365×88
Gross Weight	11.2kg
Net Weight	9.4kg

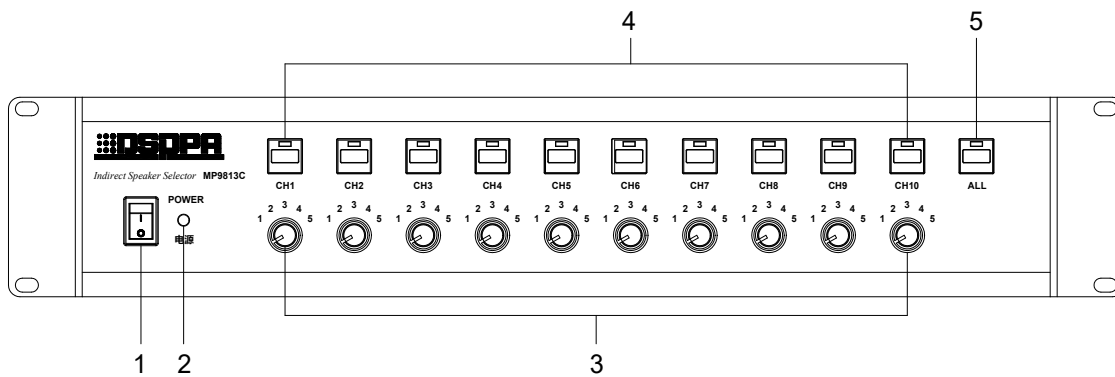

1. Power Switch

Press 1 to turn on the power and the power indicator is on.


2. Power Indicator

3. Zone Volume Control Knobs


Adjust the volume level of 10-channel zones (only valid for the channel A input audio source), clockwise to turn up the volume, counterclockwise to turn down the volume.

4. Zone Selection Buttons

5. ALL ON/OFF function control

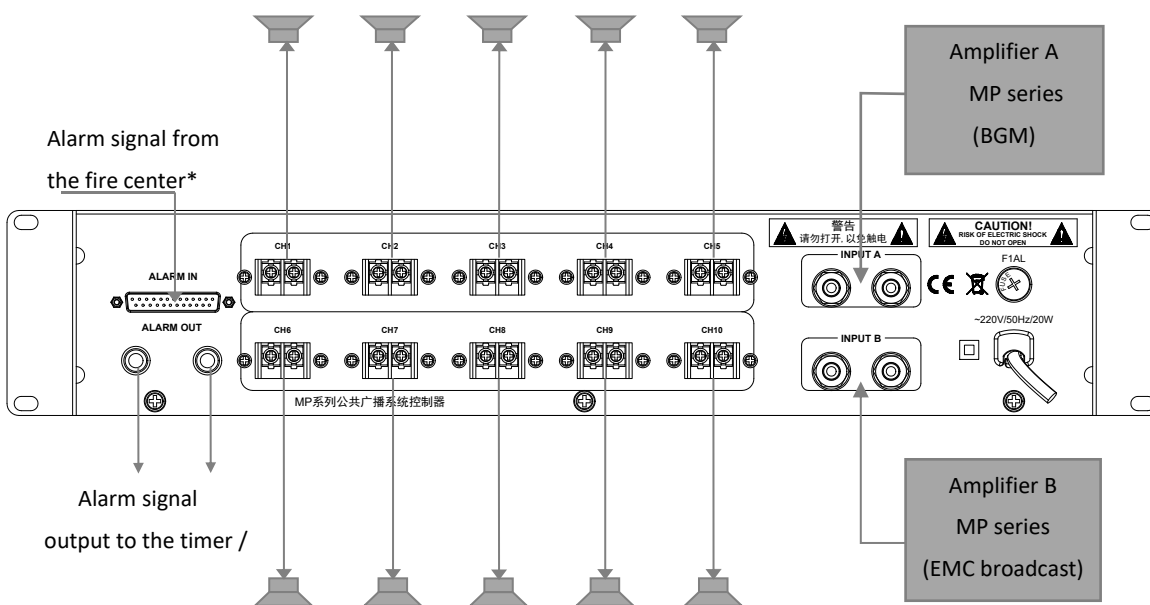

*ALARM IN Connected to the fire center

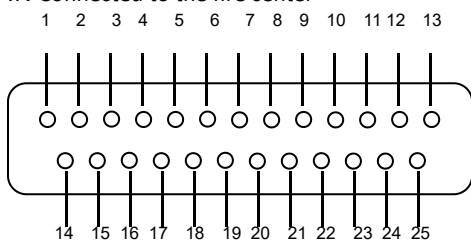

- **1-10** Hot end, corresponding to CH1-CH10 respectively.
- **14-25** Common port.