

# MP7806 2 Zones All-in-one Amplifier with MP3/Tuner/CD/CD/DVD



## Features

- 70V, 100V & 4-16  $\Omega$ , rated power 60W
- 1 video input, 1 aux input, 4 Mic XLR input
- Equipped USB interface. Able to supports common USB flash disk
- Built in DVD player and tuner with remote control.
- Bass and treble control.


## Description

This series of amplifiers are rated from 60W to 350W. There are 1 video input, 1 aux input, 4 Mic XLR input. Bass and treble controls and master volume control are provided. A remote chime trigger could be used to activate the amplifier built-in pre announcement chime tone. Extensive protection with indicator from short-circuit, overload and high temp.


## Specification

Model	MP7806
Rated output	60W
Output method	4-16 $\Omega$ balanced output, 70V & 100V fixed-voltage outputs
Input	MIC1, 2, 3 & 4: 600 $\Omega$ , 2.5mV-500mV, balanced AUX: 10k $\Omega$ , 250mV( $\pm$ 50mV), unbalanced
Frequency response	MIC: 100Hz-15kHz ( $\pm$ 3dB) AUX: 40Hz-20kHz ( $\pm$ 3dB)
Harmonic distortion	< 0.5% (1kHz, 1/3 rated power)
Line S/N (4 $\Omega$ output)	70dB
Microphone S/N (4 $\Omega$ output)	70dB
Protection	AC fuse, DC output protection, and overload protection
Power consumption	120W
Outer Packing Size (mm)	(L $\times$ W $\times$ H)520 $\times$ 500 $\times$ 235
Unit Size (mm)	(L $\times$ W $\times$ H)430 $\times$ 400 $\times$ 132
Gross weight	15.5kg
Net weight	13kg

## Rear Panel

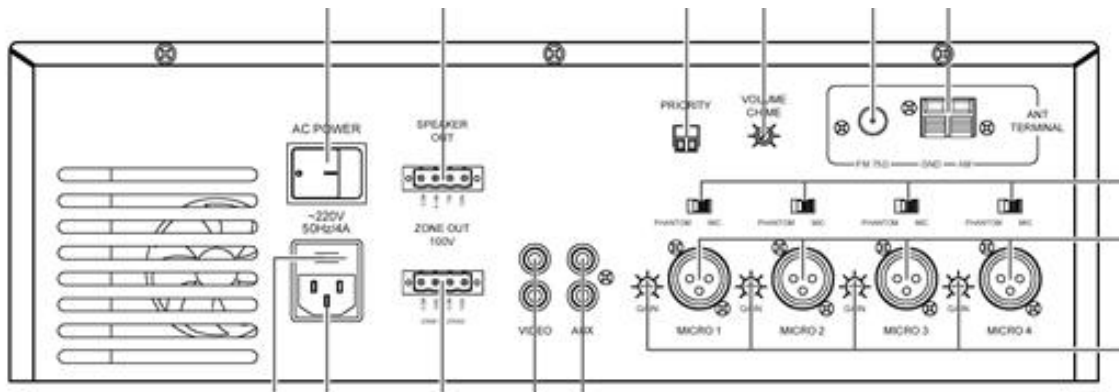

## Connection

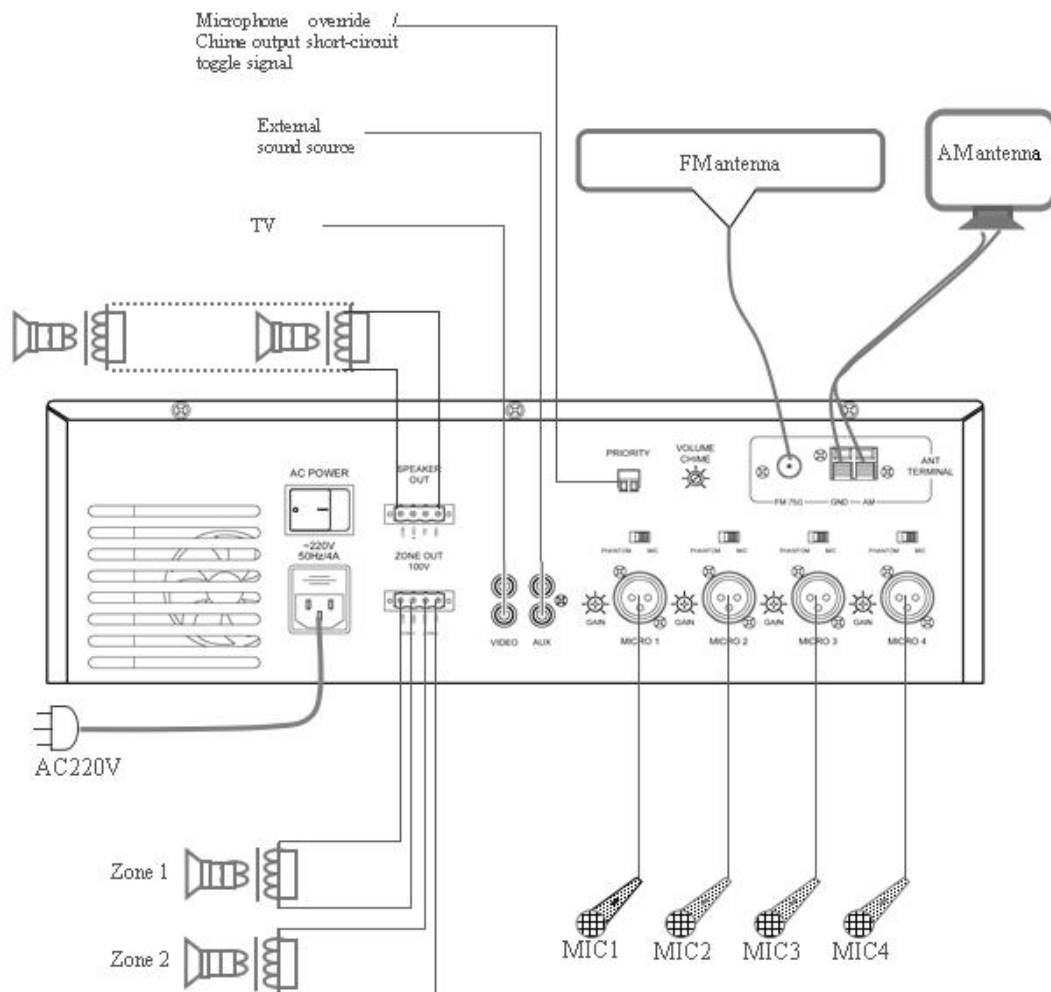

### **Packing List**

MP78 series product	1 set
Power cord	1 pcs.
AM antenna	1 pcs.
FM antenna	1 pcs.
Audio line	1 pcs.
User's Manual	1 copy
Warranty Card	1 copy
4-position terminal	2 pcs.
2-position terminal	1 pcs.