

# MP9821M M&S Amplifier Auto Switcher



## Features

- Switching M/S Amplifiers automatically when one becomes fail comes in
- 4 individual channels with AUTO CHECKING & SWITCHING function
- Manual switching function available
- Status indicator visually

## Specification

<b>Inputs</b>	Mic: 2 mV, 10 kΩ ; <b>Line: 0 dBV, 10 kΩ ;</b> <b>Alarm: 0V / +24V(or open), 0 V (short circuit) is valid .</b>
<b>Output</b>	<b>SIREN or Recorded Message: 0 dBV</b>
<b>Rec.</b>	IC inside, 60 s.
<b>Frequency response</b>	100 Hz--10 kHz
<b>Protection</b>	AC fuse ×1
<b>Power Requirement</b>	AC 220 -240 V / 50~60 Hz
<b>Dimensions</b>	485 × 88 × 365 mm
<b>Gross weight</b>	6.5 kg
<b>Net weight</b>	5.2 kg


Specifications are subject to be changed without notice.

## FRONT PANEL



- ① POWER SWITCH
- ③ VOLUMES
- ⑤ S-AMP. (ALM) INDICATORS
- ② POWER INDICATOR
- ④ MANUAL BUTTONS

## REAR PANEL

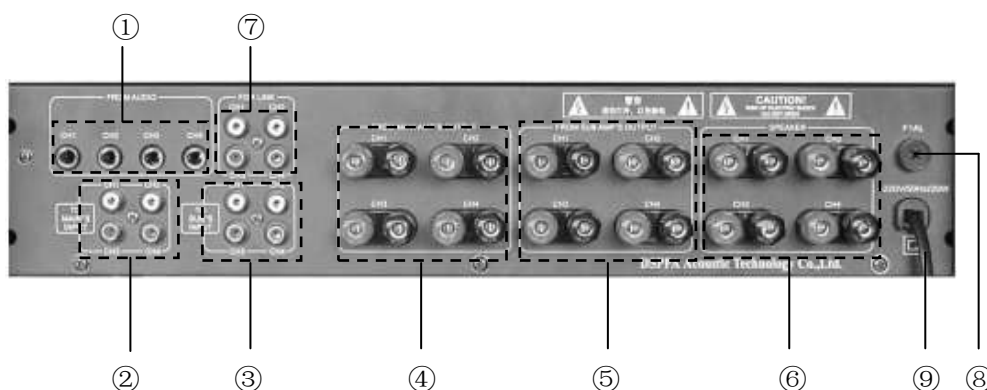

- ① SOURCE INPUT PORT
- ④ M-AMP. OUTPUT PORT
- ⑦ LINK
- ② M-AMP. INPUT PORT
- ⑤ S-AMP. OUTPUT PORT

## CONNECTIONS ( CH. 1 for example )

