

PC1010R 100 Zones Remote Paging Microphone



Features

- 100 Zones selection
- 1 gooseneck microphone available (accessory)
- Built-in 2 types of Chime
- MIC and chime volume control
- Priority muting function
- Level indication and line busy indication function
- Up to 1 km remote control distance

Description

PC1010R is a remote paging microphone with built-in chime and mute function. Up to 100 zones can be established for paging. Remote paging distance up to 1km. Easy to use. And the clear sound system of little distortion transmission will bring you great comfort.

Specification


| | |
|------------------------------|---|
| Inputs | Mic: 8.0mV, unbalanced Line: 0dBV, unbalanced |
| Audio output | 0dBV |
| Frequency response | Mic: 100 Hz---15 kHz; Line: 20 Hz---20 kHz |
| Signal to noise ratio | Mic input: greater than 60 dB Line input: greater than 70 dB |
| Protection | AC fuse 200mA |
| Power Requirement | AC120 V / 50 Hz/5W |
| Dimensions | 270×180×55 mm |
| Gross weight | 1.5 kg |
| Net weight | 1.2 kg |

FRONT PANEL



- 1 XLR gooseneck MIC Base 4 Power Switch 7 Chime Keys
- 2 Level indicator 5 Function Keys
- 8 Zone Select Keys
- 3 MIC Switch 6 Range Select Key

REAR PANEL

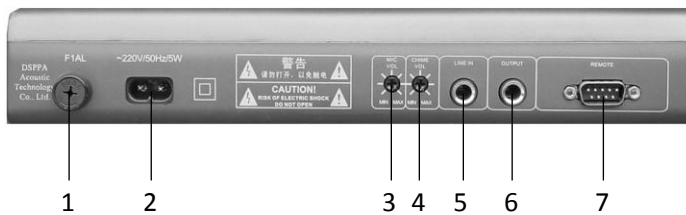

- 1 Fuse 4 Chime Volume 7 Remote Port
- 2 Mains 5 Line Input
- 3 Mic volume 6 Audio Output

MUTING FUNCTION

Signal from **LINE** is automatically muted by signal from **MIC** or **CHIME**.

CONNECTIONS

