


SM8 SM10 SM12 SM15



Features

- SM series speaker could be used as main sound reinforcement or stage monitors.
- optimally designed pentagon structure by computer
- Able to inhibit standing wave efficiently and control acoustic wave cover accurately
- Clear and mellow sound in mid-frequency, delicate sound with in high-frequency
- More than one hanging points, tripod slot, easy to install
- Adapted to occasions like shows, conferences and entertainments.

Description

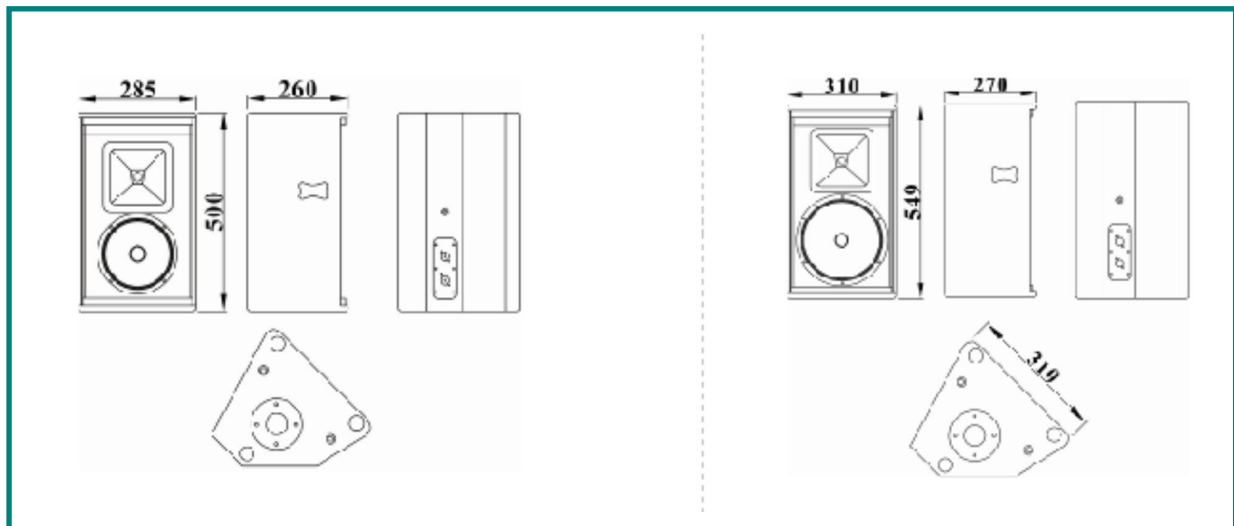

Specification

Item	SM8	SM10	SM12	SM15
Driver	LF8"×1 HF1"×1	LF10"×1 HF1.35×1	LF12"×1 HF1.75×1	LF15"×1 HF1.75×1
Freq. Resp	70Hz-20kHz	65Hz-20kHz	45Hz-18kHz	55Hz-19kHz
Sensitivity	93dB ± 2dB	94dB ± 2dB	96dB ± 2dB	97dB ± 2dB
Max SPL	115dB ± 2dB	117dB ± 2dB	121dB ± 2dB	123dB ± 2dB
Rated impedance	8Ω	8Ω	8Ω	8Ω
Rated power	150W	250W	300W	400W
Direction (H×V)	100"×50"	100"×50"	90"×50"	75"×50"
Size(L×W×H)	500×285×260 mm	549×310×270 mm	620×410×543 mm	720×454×388 mm
Net weight	10.5kg	13kg	23kg	26kg