

MP1000U 2 Zones Integrated Mixer Amplifier with Remote Paging



Features

- 70V/100V & 4-16Ω speaker output
- Rated power 60/120/250/350W
- Built-in two zones of 100V output
- Built-in 4 Mic and 2 AUX and USB/FM/Bluetooth
- Support 2 remote paging stations
- Individual volume control for Mic 1-4 and Line 1-2
- Mic 2-4 with phantom power 48V and gain control
- Chime/Siren/Mute inputs with gain control
- Priority: EMC/MIC1/Remote Microphone/Short Circuit adjustable
- With 19" rack mount ears(optional)

Description

The Integrated Mixer Amplifier MP1000U is a 2 zones mix amplifier integrated with the functions of U disk, radio, Bluetooth, zones and remote paging. With various functions, including clear screen display of status, EMC input, Mic input with phantom power, priority of inputs adjustable etc. The operation is very simple and user-friendly. The device can meet the requirements of the users and can be widely applied.

Specification


| | |
|-----------------------|------------------|
| Item | MP1000U |
| Rate power | 350W |
| Speaker Outputs | 70V/100V & 4-16Ω |
| THD | ≅ 1% |
| Freq.response | 80Hz-16kHz |
| Mic Input Sensitivity | 5.0mV (±0.5mV) |
| AUX Input Sensitivity | 775mV (±40mV) |
| Dimension(L×W×H) | 418×338×88 mm |
| Net Weight | 13.6kg |



Clear Screen Display of Status



Mic Inputs with Phantom Power




4-16Ω & 70V/100V Speaker Outputs



Dry contact inputs



EMC input

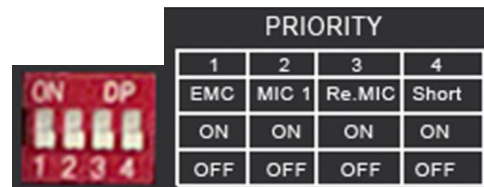

Priority of inputs adjustable